

UNITED STATES PATENT AND TRADEMARK OFFICE

I, Charles Edward SITCH BA,

Managing Director of RWS Group Ltd UK Translation Division, of Europa House, Marsham Way, Gerrards Cross, Buckinghamshire, England declare;

1. That I am a citizen of the United Kingdom of Great Britain and Northern Ireland.
2. That the translator responsible for the attached translation is well acquainted with the French and English languages.
3. That the attached is, to the best of RWS Group Ltd knowledge and belief, a true translation into the English language of the accompanying copy of the specification filed with the application for a patent at the EPO on September 19, 2002 under the number 02020949.0 and the official certificate attached thereto.
4. That I believe that all statements made herein of my own knowledge are true and that all statements made on information and belief are true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the patent application in the United States of America or any patent issuing thereon.



---

For and on behalf of RWS Group Ltd  
The 16th day of July 2010



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterle-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

**02020949.0**

Der Präsident des Europäischen Patentamts;  
im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**  
[signature]



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Anmeldung Nr.:  
Application no.: 02020949.0  
Demande no.:

Anmeldetag:  
Date of filing: 19.09.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

NESTEC S.A.  
Avenue Nestlé 55  
CH-1800 Vevey  
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method of packaging a frozen dessert

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Payz/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

A23G/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

## **Method of packaging a frozen dessert**

The invention relates to a method of packaging a thick but malleable frozen dessert, and for dispensing it  
5 under pressure in the expanded state, it being possible for the degree of expansion to be chosen independently of the consistency of the said dessert.

When it is desired to dispense a frozen dessert in the  
10 expanded state, that is to say in aerated form, it is known by Patent US A 4 421 778 to foam an ice-cream or milkshake mix in order to expand it, to fill receptacles with portions of the expanded mix, which receptacles are then placed in a freezer and where the  
15 product is then preserved at freezing temperature. The product is spoonable at this temperature. In fact, the step of foaming at a positive temperature with the introduction of air creates an expanded state which is not stable. There is no indication that the product can  
20 be introduced into a pressurized container or can be dispensed at the cold storage temperature from this container in the form of a frozen dessert in a stable expanded state.

25 Moreover, a method and an apparatus making it possible to introduce an expansion gas, nitrogen dioxide, into a liquid, therefore not frozen, mix at a high pressure for the purpose of entraining enough gas into the ice-cream in order to produce the desired expanded  
30 state is known, for example, from Patent US A 4 659 575. The non-frozen mix which has been subjected to this pre-aeration is then withdrawn from a mixing tank containing it to a container for dispensing it after enough gas has been entrained, then it is  
35 subsequently frozen at the dispensing location.

To avoid the drawback of the instability of the expanded state of a liquid mix, it would be conceivable to put the product to be packaged in the liquid state

into the packaging receptacle and then to introduce into this receptacle a propellant gas which is slightly soluble in the said liquid product, after which the receptacle would be cooled to the dispensing  
5 temperature of the product, at which temperature it is pasty; in this case, the product is packaged in the unexpanded, pasty state and it is extruded under the thrust of the propellant gas: at the outlet of the dispensing member, the product would be put in the  
10 expanded state by the expansion of the propellant gas dissolved in the said product. However, this procedure is not satisfactory for two reasons:

- on the one hand, the amount of propellant gas dissolved in the product is difficult to control,  
15 such that the expanded state obtained is not constant and that the amount of gas remaining available for propulsion of the product is therefore not constant either; and
- on the other hand, the amount of propellant gas dissolved in the product is obviously dependent on  
20 the gas pressure, which is imposed by the extrudability of the pasty product, hence the result is that, for a given product, the expanded state likely to be obtained on dispensing it is  
25 necessarily linked to the pressure of the propellant gas and to the nature of the said gas.

The aim of the present invention is to provide a method of packaging and dispensing a thick but malleable  
30 frozen dessert, by means of which, on the one hand, it is possible to package the said product in a pressurized receptacle with a high enough pressure given the viscosity of the product, and, on the other hand, it is possible to choose the degree to which the  
35 product is expanded at the output of the pressurized receptacle independently of the pressure required for propulsion of the product from the receptacle and of the speed at which the product comes out of the receptacle.

By virtue of such a method, it especially becomes possible to dispense a frozen dessert, such as the one described for example in European Patent EP B 878 998 or in French Patent Application FR 02 05620, by  
5 choosing the degree of expansion that is desired for the product dispensed at the outlet of the receptacle; in fact, it is desirable not to dispense such a frozen dessert in the form of a compact paste, but it is also desirable to prevent dispensing in the form of a foam  
10 which is too aerated.

The invention is partly based on the fact that two different gases are chosen for dispensing, of which one has the propulsion function and the other the expansion  
15 function. The propellant gas is virtually insoluble in the product to be dispensed when in the liquid state while the expansion gas is highly soluble in the said liquid product. The expansion of the dispensed product will then be dependent on the amount and on the  
20 solubility of the expansion gas introduced into the receptacle, while the ejection of the product will depend on the pressure of the propellant gas introduced into the receptacle.

Consequently, the subject of the present invention is a method of packaging a thick but malleable frozen dessert, and for dispensing it under pressure in the expanded state, in which method the product is placed in a container equipped with a dispensing member, then,  
30 after having put the said dispensing member in the closed position, the said container is pressurized by a propellant gas to a pressure high enough to ensure suitable dispensing, given the consistency of the product to be dispensed and characteristics of the  
35 dispensing member, characterized in that:

- a) a propellant gas which is virtually insoluble in the product to be dispensed is chosen;
- b) an expansion gas which is different from the propellant gas and highly soluble in the product

to be dispensed is chosen in order to expand the product when it is dispensed, the amount of expansion gas used being defined depending on the degree of expansion desired on dispensing, the expansion gas being dissolved in the product to be dispensed by putting the expansion gas in contact with the said product in a freezer and

5 c) the passage of the said product takes place in the pasty state then it is dispensed by opening the dispensing member, the said product being expanded up to the desired degree, determined prior to filling, as described in step 1b, by expanding the expansion gas which is dissolved therein.

15 To implement the method, an ice-cream mix is treated in a freezer which is supplied with expansion gas so as to partially freeze and expand the said mix, under temperature and pressure conditions promoting good dissolution of the expansion gas in the said mix. In practice, it is preferred to operate at a temperature of about  $-8^{\circ}\text{C}$  to  $-11^{\circ}\text{C}$  at the output and at a constant pressure equal to atmospheric pressure up to 10 bars above atmospheric pressure in the freezer.

25 A gas that is highly soluble in the mix, preferably chosen from nitrous oxide ( $\text{N}_2\text{O}$ ) and carbon dioxide, is used as an expansion gas.

30 The partly frozen and partly expanded mix is placed in the container by means of a metering device maintaining the initial pressure in the pipes and in the metering unit, for example by exerting a counterpressure upstream from the dispensing member. This way of proceeding makes it possible to limit the expansion of the volume of the product during filling by partial expansion of the expansion gas.

According to a first embodiment of the filling step of

the method, a metering nozzle moving with an up and down movement is used as filling device, allowing filling by rising from the bottom of the containers, of the type called "bottom-up filler", so as to maximize  
5 the filling and to prevent the formation of pockets free of product. The container is filled, then closed by the dispensing member, sufficiently quickly to limit the expansion.

10 In a second embodiment, the product is filled through the dispensing member fixed beforehand to the container. In this case, the piston is positioned in the top of the container, against the dispensing member, so as to limit the pockets of air in the  
15 product. This second embodiment is preferred, since it is more efficient in limiting the expansion at the time of filling.

In the method which has been defined above, a rigid  
20 receptacle is used as container, into which, on the one hand, the product to be packaged which contains the amount of expansion gas needed to obtain the desired expanded state of the dispensed product is introduced, and, on the other hand, the propellant gas is  
25 introduced at the pressure desired for the dispensing.

According to a first implementational embodiment of the method, a rigid cylindrical receptacle is used as container, in which receptacle a sliding piston is  
30 placed, which divides the receptacle into two compartments, one of which is closed by the dispensing member while the other has a valve enabling the propellant gas to be injected and the pressure to be maintained, the product containing the expansion gas  
35 being introduced into the receptacle before it is closed by the dispensing member, or through the dispensing member itself.

According to a second implementational embodiment, a



rigid receptacle containing a flexible pouch is used. The container is equipped, on one side, with a dispensing member connected to the pouch, and, on the other side, with a valve allowing the propellant gas to be injected and the pressure of the container to be maintained.

According to this second implementational mode, the rigid receptacle equipped internally with the flexible pouch connected to the outside by the dispensing member secured to the receptacle is used as container, the product containing the expansion gas is placed in the receptacle, through the dispensing member, inside the pouch and the propellant gas is then injected into the pouch through the valve.

In the first implementational mode, it is possible, since a food product is to be packaged and dispensed, to use a metal receptacle and sliding piston which could undergo a conventional sterilization treatment without any difficulty; advantageously, the receptacle and the sliding piston consist of the same metal, which prevents any problem of differential expansion and maintains good sliding of the piston in the receptacle. However, the piston may also be made from a plastic, for example from a polyolefin, it being understood that since the product to be dispensed is a food product, the plastic used must be authorized for food packaging.

Advantageously, in this variant, a piston capable of sliding in the receptacle is used and the propellant gas is injected via the valve, the piston then bearing on the product: the degree of expansion of the dispensed product is determined by the amount of expansion gas contained in the product injected by the dispensing member (expressed in l of gas per 100 l of ice-cream mix for example) and the pressure is defined in order to optimize the time for filling the receptacle. Before injecting the propellant gas at a

pressure greater than the pressure in the product compartment, the product to be dispensed, charged, at a pressure greater than atmospheric pressure, with partially dissolved expansion gas, is prepared and, the  
5 said charged product is metered into the container and the propellant gas is injected into the said container in order to pressurize the product to be dispensed to a pressure greater than that for filling of the product.

10 Since the product to be dispensed is a food product, in order that the product is preserved satisfactorily during storage, acceptable propellant and expansion gases must of course be chosen, bearing in mind existing food standards; according to the invention,  
15 nitrogen ( $N_2$ ) or air having a dewpoint less than the minimum temperature to which the container will be exposed between manufacture of the product and its use can advantageously be chosen as propellant gas, and nitrous oxide ( $N_2O$ ) as expansion gas.

20 According to the invention, it has been found that good results were obtained with regard to the expansion degree and its stability when 80 to 200 l of expansion gas, especially  $N_2O$ , per 100 l of mix were used. Thus,  
25 expansion of about 5 to 35% by volume was obtained at the freezer (depending on the pressure in the said freezer) and about 50 to 100% by volume in the final product delivered. This difference in expansion is due to the fact that most of the expansion gas is dissolved  
30 in the freezer during the expansion and freezing operation. This gas partially comes out of solution on leaving the freezer and much more strongly in the dispensing member of the aerosol spray on dispensing at ambient pressure. It is advantageous according to the  
35 invention to check that the expansion is as small as possible during filling so as to maximize the amount of product metered into the containers. On the other hand, it will be advantageous for the product leaving the dispensing member to have an expansion comparable to

that which is common in ice-creams. This results from increasing the amount of product metered at constant volume. The best results were obtained at a constant pressure of about 4 to 5 bar in the freezer and by  
5 maintaining a counterpressure of the same order, in the pipes feeding the metering element and in the latter.

In order for the subject of the invention to be better understood, two implementational embodiments, shown  
10 schematically in the appended drawing and corresponding to the packaging of a frozen dessert, will now be described by way of purely illustrative and non-limiting examples.

15 In this drawing:

Figures 1 to 3 and 7 and 8 show the steps of a first variant of the method according to the invention,

20 Figures 4 to 6 show the steps of a second variant of the method according to the invention, and

Figures 9 to 11 show various types of valves for filling with the propellant gas which can be used in  
25 the method according to the invention.

With reference to the drawing, it can be seen that, for all of the figures, a cylindrical metal container is denoted overall by 1 and comprises a bottom and an  
30 upper part 2 attached by crimping to the side wall of the said container; in the central region of this part 2, a dish is also attached by crimping, which dish bears, in its centre, a dispensing member 3 comprising a rotating mechanism, which allows it to be opened and  
35 closed, by action on a manoeuvring fin 3a. Although this is not described in the examples corresponding to Figures 1 to 3, a translatable pusher could of course be used in place of the aforementioned rotating mechanism. Such a pusher is shown in connection with

Figures 7 and 8. The dispensing member 3 comprises, at the outlet, a nozzle to shape the cross section of the column of dispensed product. The packaged product is in the pasty state, and is thick but malleable. For the  
5 two variants shown in the drawing, the propellant gas used is nitrogen or compressed air having a dewpoint less than the minimum temperature to which the container will be exposed between manufacture of the product and its use, and the expansion gas is nitrous  
10 oxide.

In the following examples, the product placed in the receptacle 1 has the following formulation (% by weight):

15	Fat		10.9%
	Powdered whole milk		7.35%
	Derivatives of dairy origin		10.9%
	Glucose and glucose syrup		16.1%
	Emulsifier		0.38%
20	Thickener	about	0.13%
	Egg white		0.05%
	Colourings and flavourings		0.08%
	Water		54.11%

25 Before the product is placed in the container 1, the said receptacle can be sterilized in a known manner, given that the packaged product is a food product.

Before putting it in place, the product, whose mix  
30 formulation has been given above, is treated in a freezer at a temperature of  $-8.5^{\circ}\text{C}$  to  $-10^{\circ}\text{C}$ , supplied with nitrous oxide instead of the air normally used for expansion, the amount of nitrous oxide introduced into the mix being from 140 to 145 l of  $\text{N}_2\text{O}$  per 100 l of  
35 mix. The product coming out of the freezer is packaged in the container 1 at a pressure of 4 to -5 bar. The propellant gas (nitrogen or compressed air having a dewpoint less than  $-40^{\circ}\text{C}$ ) is then introduced at a pressure of about 10 bar through the valve 4. Once the

product has been packaged, the product is brought to a temperature less than or equal to  $-18^{\circ}\text{C}$ , at which temperature the said product is in the pasty state. The internal volume of the empty container 1, without piston and without dispensing member, is about 0.8 litres and the volume of product introduced into the container for subsequent dispensing is about 0.6 litres.

Figures 1 to 3, 7 and 8 show the various steps of the first variant of the method according to the invention. In this variant, the container 1 has a valve 4 in its base and, internally, it has a sliding piston 5 (see Figure 1). In the drawing, for the purpose of simplification, a piston 5, whose circular face is flat is shown; however, in a known manner, a piston can be used whose circular face is shaped so as to have, at its centre, a cavity allowing the part of the dispensing member 3 which projects inside the container 1 to be housed: in this way, the emptying rate of the receptacle during dispensing is improved.

In a first example, described the half-frozen unexpanded product P is put in place in the container without the dish bearing the dispensing member 3 by means of a filling nozzle 6 moving with an up and down movement in the direction of the arrow f1, the filling being carried out from the bottom up by vertical translational movement of the filling nozzle 6. The filling is carried out rapidly and, when the container is full, the dish bearing the dispensing member 3 is crimped (put in place in the direction f2). The piston 5 is then in the low position (see Figure 2) and the pressure P1. Nitrogen at a pressure P2 equal to 10 bar (or compressed air having a dewpoint equal to or less than  $-40^{\circ}\text{C}$ ) is injected below the piston 5, the introduction taking place through the valve 4 (see Figure 3).

The temperature of the product in the container 1 is

then lowered to a temperature equal to or less than  
-18°C, by passing the container filled with the product  
through a freezing tunnel, the temperature of which is  
-35 to -38°C, the product to be dispensed thus taking  
5 on its pasty dispensing consistency.

In a second example, the product P is filled through  
the dispensing member 3 fastened beforehand to the  
container 1, as illustrated in Figure 7. In this case,  
10 the piston 5 is positioned before filling in the top of  
the container, against the dispensing member. As the  
product P is introduced into the container, the piston  
5 moves towards the bottom of the container 1 in the  
direction of the arrow F1. The air contained between  
15 the piston and the bottom of the container is expelled  
through the valve 4. This method of proceeding makes it  
possible to limit the pockets of air in the packaged  
product. The piston 5 is then in the low position  
(Figure 8) and the pressure is P1. Nitrogen at a  
20 pressure P2 equal to 10 bar (or compressed air having a  
dewpoint equal to or less than -40°C) is injected below  
the piston 5, the introduction taking place through the  
valve 4 (Figure 8).

25 The temperature of the product in the container 1 is  
then lowered to a temperature equal to or less than  
-18°C, by passing the container filled with the product  
through a freezing tunnel, the temperature of which is  
-35 to -38°C, the product to be dispensed thus taking  
30 on its pasty dispensing consistency.

The filling mode described in this second example is  
preferred, since it is more efficient in limiting the  
expansion of the product at the time of filling. In the  
35 second variant shown in Figures 4 to 6, the container 1  
has a valve 4 in its bottom, through which the  
propellant gas (nitrogen or compressed air having a  
dewpoint less than the minimum temperature to which the  
container will be exposed between manufacture of the

product and its use) can be injected which constitutes the propellant gas. Where the dish which bears the dispensing member 3 has been crimped onto the container 1, a flexible pouch 8 (see Figure 4) has been fastened  
5 inside the container 1. The partially frozen and expanded product P is then introduced into the pouch 8 through the dispensing member 3 in the open position (see Figure 5). The dispensing member 3 is closed and the propellant gas is injected at a pressure of 8 to  
10 15 bar through the valve 4 (see Figure 6). During filling, the pressure in the container 1 has therefore passed from atmospheric pressure to the atmospheric pressure P1 10 bar above atmospheric pressure bar, then to the pressure P2 of 8 to 15 bar above atmospheric  
15 pressure by the final injection of the propellant gas.

Several solutions for the valve systems 4 are known and have been used in the examples described.

20 The first type, known by the name "Nicholson valve", is illustrated in Figure 9. In this case, the valve is applied to the bottle before injection of the propellant gas, so as to be only partially engaged in the orifice made in the bottom of the container. The  
25 valve allows the propellant gas to pass at the time of the injection, then the valve is thrust into the orifice so as to close it completely and to maintain the pressure in the container.

30 The second type is known by the name "umbrella valve" and is described in Figure 10. This valve may also be inserted into the orifice made for this purpose under the container before filling. The valve allows the propellant gas to pass at the time of injection, then,  
35 under the effect of the pressure created in this way in the container, the valve closes the orifice so as to maintain the pressure in the container.

In the third case, a "rope bung" valve, described in

Figure 11, the propellant gas is injected into the orifice made for this purpose in the bottom of the container, then the valve (which in this case is more like a plug) is inserted into the orifice so as to  
5 close it and to maintain the pressure in the container.



### Claims

1. Method of packaging a thick but malleable frozen dessert, and for dispensing it under pressure in the expanded state, in which method the product is placed in a container equipped with a dispensing member, then, after having put the said dispensing member in the closed position, the said container is pressurized by a propellant gas to a pressure high enough to ensure suitable dispensing, given the consistency of the product to be dispensed and characteristics of the dispensing member, characterized in that:

- a) a propellant gas which is virtually insoluble in the product to be dispensed is chosen;
- b) an expansion gas which is different from the propellant gas and highly soluble in the product to be dispensed is chosen in order to expand the product when it is dispensed, the amount of expansion gas used being defined depending on the degree of expansion desired on dispensing, the expansion gas being dissolved in the product to be dispensed by putting the expansion gas in contact with the said product in a freezer and
- c) the passage of the said product takes place in the pasty state then it is dispensed by opening the dispensing member, the said product being expanded to the desired degree, determined prior to filling, as described in step 1b, by expanding the expansion gas which is dissolved therein.

2. Method according to Claim 1, in which an ice-cream mix is treated in a freezer which is supplied with expansion gas so as to partially freeze and expand the said mix, under temperature and pressure conditions promoting good dissolution of the expansion gas in the said mix, especially at a temperature of about 8°C to -12°C at the output and at a constant pressure equal to atmospheric pressure up to 10 bars above atmospheric pressure in the freezer.

3. Method according to Claim 1, in which a gas that is highly soluble in the mix, preferably chosen from nitrous oxide (N<sub>2</sub>O) and carbon dioxide, is used as an expansion gas.

4. Method according to Claim 1, in which dinitrogen or compressed air having a dewpoint less than the minimum temperature to which the container will be subjected between manufacture of the product and its use is used as propellant gas.

5. Method according to one of Claims 1, 2, 3 and 4, in which the partly frozen and partly expanded mix is placed in the container by means of a metering device ensuring the pressure is kept as close as possible to the initial pressure in the freezer, in the pipes and in the metering unit, especially by exerting a counterpressure as close as possible upstream from the metering nozzle, so as to limit the expansion of the volume of the product during filling by partial expansion of the expansion gas.

6. Method according to one of Claims 1, 2, 3 and 4, in which a metering nozzle moving with an up and down movement is used as filling device, allowing filling by rising from the bottom of the container, of the type called "bottom-up filler", so as to optimize the filling and to prevent the formation of pockets free of product.

7. Method according to Claim 1, in which the container is filled sufficiently quickly before expansion occurs or, alternatively, hermetically under pressure.

8. Method according to one of Claims 1, 2, 3 and 4, in which the container is filled through the dispensing member, the piston then being positioned just under the

dispensing member.

9. Method according to one of Claims 1, 2, 3 and 4,  
in which a rigid receptacle is used as container, into  
5 which, on the one hand, the product to be packaged  
which contains the amount of expansion gas needed to  
obtain the desired expanded state of the dispensed  
product is introduced, and, on the other hand, the  
propellant gas is introduced at the pressure desired  
10 for the dispensing.

10. Method according to Claim 9, in which a flexible  
pouch (8) defining a volume connected to the dispensing  
member (3) is used as container, which pouch is placed  
15 in a rigid receptacle (1), to which the dispensing  
member (3) associated with the pouch (8) is fastened,  
and the propellant gas is injected into the said  
receptacle (1), outside the pouch (8), the product to  
be dispensed being introduced into the pouch (8).

20 11. Method according to Claim 9, in which a rigid  
cylindrical receptacle (1) is used as container, in  
which receptacle a sliding piston (5) is placed, which  
divides the receptacle (1) into two compartments, one  
25 of which is closed by the dispensing member (3) while  
the other has a valve (4) enabling the propellant gas  
to be injected, the product to be dispensed being  
introduced into the receptacle (1) from the side of the  
compartment closed by the dispensing member (3).

30 12. Method according to one of Claims 1 to 11, in  
which the temperature of the product is lowered to a  
value below  $-10^{\circ}\text{C}$  so that it takes on its packaging  
consistency.

## **Abstract**

### **Method of packaging a frozen dessert**

The invention relates to a method for packaging a thick but malleable frozen dessert and for dispensing it under pressure in the expanded state. According to this method:

- a) the product is placed in the semi-frozen and expanded state in a container (1) and a propellant gas which is substantially insoluble in the said product is chosen;
- b) the product is dispensed by opening the dispensing member (3), the said product being expanded to the degree determined during filling by expansion of the expansion gas, which is dissolved therein.

(Figure to be published: Figure 3)

1/2

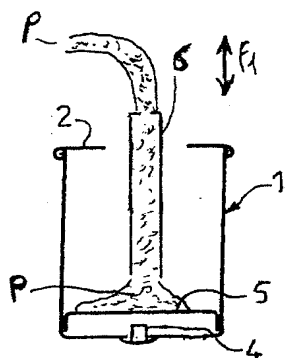


FIG. 1




FIG. 2




FIG. 3




FIG. 4




FIG. 5




FIG. 6

2/21

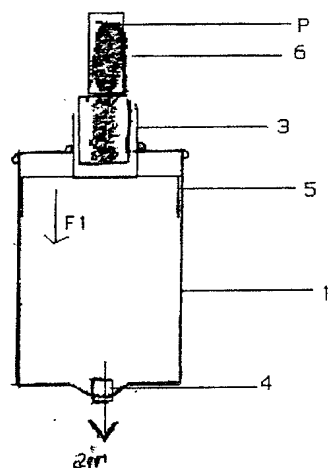


FIG. 7

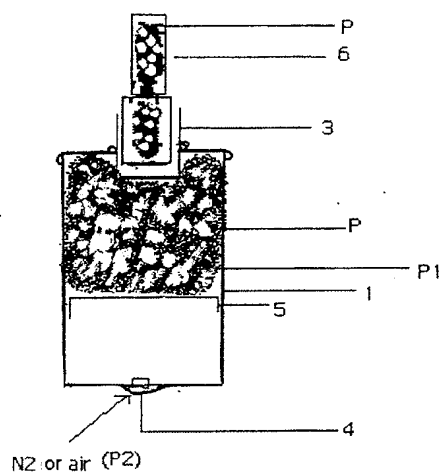


FIG. 8

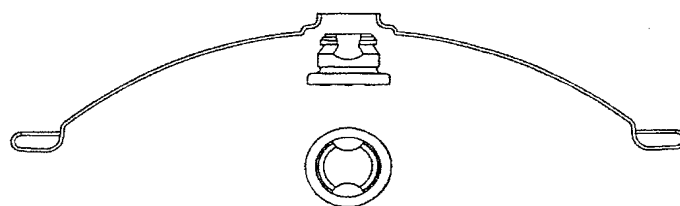


FIG. 9

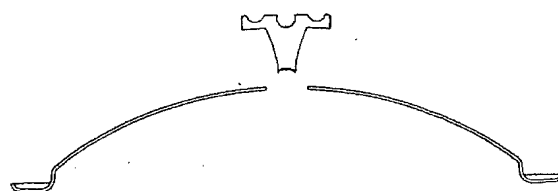


FIG. 10

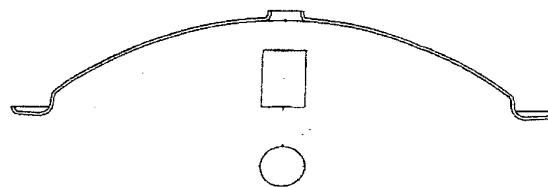


FIG. 11